

## ACTUATED BUTTERFLY VALVE PACKAGE

LIMIT SWITCH - Explosion Proof Ex IIb C T6  
DOME TYPE INDICATOR

SOLENOID - Explosion Proof EEx-m- II T6

PNEUMATIC ACTUATOR - Double Acting/Spring Return



### LIMIT SWITCH BOX

- IP67 weatherproof enclosure
- Powder coated aluminium die cast housing
- Dome type polycarbonate indicator
- 2 SPDT switches
- VDI/VDE mounting
- Stainless steel mounting bracket

### SOLENOID

- IP65 weatherproof enclosure
- NAMUR Interface
- 3/2 way and 5/2 way
- Polyamide body
- Manual override
- Operating voltage 24V DC and 240VAC
- Port connection 1/4"
- DIN connector


### ACTUATOR

- Heavy duty extruded aluminium body
- Double acting or spring return models
- Rack and pinion design
- ISO 5211 mounting
- NAMUR solenoid interface
- VDI/VDE top works
- Fully adjustable travel stops
- Stainless steel drive shaft
- NBR 'O' rings and seals
- PTFE friction guides

### VALVE

- Cast iron epoxy coated body PN16 rated
- Wafer or lugged design
- Stainless steel disc
- Stainless steel shaft
- EPDM liner
- ISO 5211 top works

### Fig. IP65-APL-6DIN

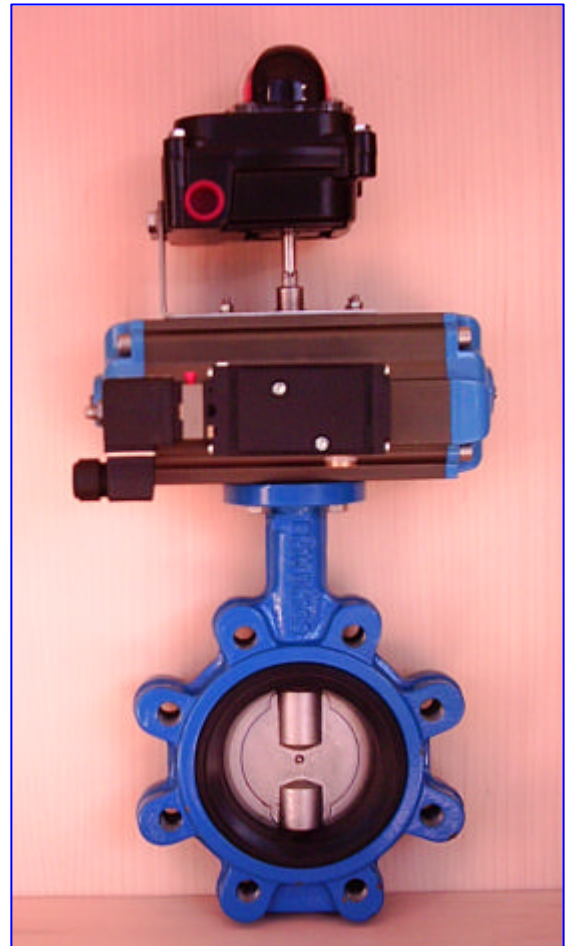

Data Sheet No. IP65-APL-6DIN

Details subject to change

### OPTIONS AND ACCESSORIES

#### Control Accessories

- Quick exhaust valves
- High temp actuator seals
- Speed controllers
- Exhaust silencers
- Manual override
- Positioners

**Global Valves and Engineering Pty Ltd**

*"your partner for the future"*