


GLOBAL "TWIST-SET" POSITION INDICATOR

With Micro Switches

With Position transmitter 4-20 milli amps



Fig. 1101

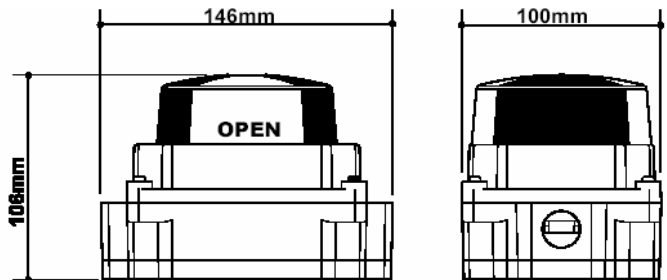

HOUSING

Materials: lid - Polycarbonate
body - ABS
shaft - Stainless Steel

Electrical Entries: 2 x M20 (PG 13.5 or 1/2" NPT)
Mounting: VDI/VDE3845 (NAMUR)
Enclosure: IP 67


POSITION TRANSMITTER

The card has an output of 4-20 milli amps proportional to the position of the valve. Two trimmers are fitted to the board for the zero and span settings.

OPTIONS

The transmitter can be supplied with two S.P.D.T. switches

WIRING DIAGRAM

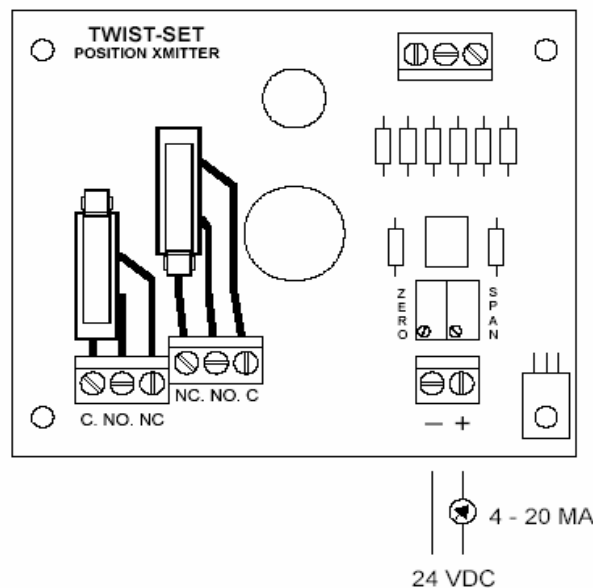

Data Sheet No.1101

For installation, operation and maintenance refer to I.O.M.

Details subject to change

Global Valves and Engineering Pty Ltd
"your partner for the future"

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au