


GLOBAL "TWIST-SET" POSITION INDICATOR

With Hermetically Sealed Proximity Switches

With two magnetic hermetically sealed proximity sensors
SPDT



Fig. 1201

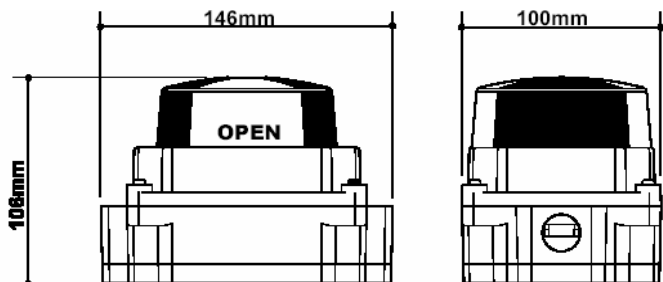

HOUSING

Materials: lid - Polycarbonate
body - ABS
shaft - Stainless Steel

Electrical Entries: 2 x M20 (PG 13.5 or 1/2" NPT)
Mounting: VDI/VDE3845 (NAMUR)
Enclosure: IP 67


SENSORS

Type: S.P.D.T. Magnetic proximity switch
Rating: 0-220 Volts AC or DC
0.5Amps
Temperature: -20°C to 80°C

OPTIONS

With 2 Hermetically Sealed I/S Proximity Sensor
With 4 Hermetically Sealed I/S Proximity Sensor

WIRING DIAGRAM

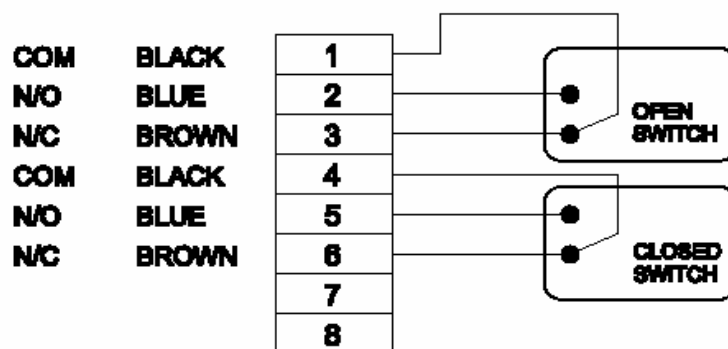

Data Sheet No.1201

For installation, operation and maintenance refer to I.O.M.

Details subject to change

Global Valves and Engineering Pty Ltd
"your partner for the future"

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au