


# GLOBAL "TWIST-SET" POSITION INDICATOR

With P & F Sensors

With two P & F NJ2-V3-N proximity sensors I/S certified



Fig. 1204

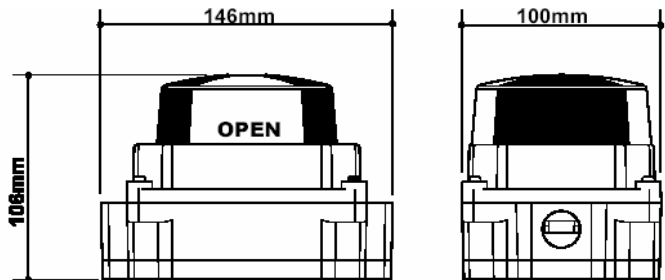

## HOUSING


Materials: lid - Polycarbonate  
body - ABS  
shaft - Stainless Steel

Electrical Entries: 2 x M20 (PG 13.5 or 1/2" NPT)  
Mounting: VDI/VDE3845 (NAMUR)  
Enclosure: IP 67

## SENSORS

Pepperl + Fuchs type NJ2-V3-N  
Nominal voltage [V] 8  
Current Consumption:  
Sensing face covered [mA] 1  
Sensing face free [mA] 3  
Intrinsically safe EEx ia IIC T6

## WIRING DIAGRAM

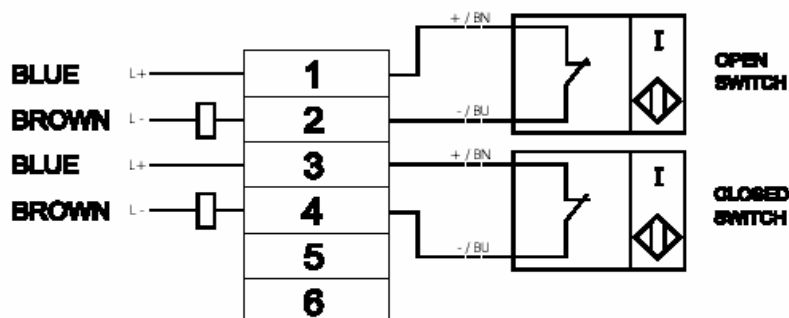

Data Sheet No.1204

For installation, operation and maintenance refer to I.O.M.

Details subject to change

**Global Valves and Engineering Pty Ltd**  
"your partner for the future"

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au