

GAS SERVICE BALL VALVE

FULL BORE 25-50 BAR RATED
SIZE RANGE 8mm-50mm

AGA Approved
BSP Ends



Suitable for isolating and regulating duties on gas, cold / hot water, condensate, compressed air and hydrocarbon services in Plumbing, HVAC, Mining, Power Generation and Natural Gas Applications Industry.


FEATURES

- AGA Approved for natural gas
- Full bore design
- Bubble tight shut off
- Viton / NBR "O" stem seals
- Yellow aluminium lever - gas duty
- Meets ISO 9000 requirements

OPTIONS

- Fig. RED5 (Non AGA approved)
- Fig. 14M (Heavy duty patt. non AGA)
- Fig. 11CR (DZR valve non AGA)

Fig. 066

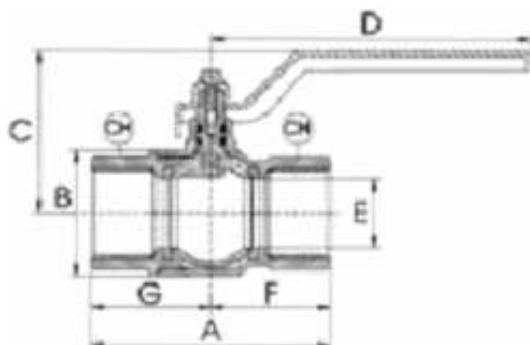

COMPONENT MATERIAL

COMPONENT	MATERIAL
BODY	BRASS - PLATED
BALL	BRASS - HARD CHROMED
SEAT	P.T.F.E.
STEM	BRASS CW 614N
LEVER	ALUMINIUM
BODY FINISH	NICKEL PLATED

DIMENSIONS

SIZE mm	8	10	15	20	25	32	40	50
A	49.5	52.4	61.0	68.0	85.0	99.5	109.0	130.0
C	37.0	37.0	48.3	54.8	58.8	75.0	90.0	97.0
D	80.0	80.0	88.5	113.0	113.0	137.5	157.3	157.3
MAX kPa Gas 60°C	5,000	5,000	5,000	4,000	4,000	3,000	3,000	2,500
MAX kPa Air 220°C	5,000	5,000	5,000	4,000	4,000	3,000	3,000	2,500
BORE Ø	10	10	15	20	25	32	40	50

Data Sheet No.BL-066-Rev01

For installation, operation and maintenance refer to I.O.M.

Details subject to change

Global Valves and Engineering Pty Ltd

"your partner for the future"

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au