

**BRASS CHECK VALVE**  
**SPRING LOADED**  
**SIZE RANGE 10mm-100mm** **BSP Ends**

Suitable for preventing reverse flow in Water Treatment, Pulp & Paper, Power Generation, Oil and Gas, Petroleum and Petro-Chem, HVAC, Mining and other Industrial Applications




**FEATURES**

- Maximum working temperature 110 Deg C
- Spring loaded
- Soft seat
- Stainless steel spring
- Horizontal or vertical installation

**OPTIONS**

- Fig. York 103 (light pattern)

**Fig. EURO100**

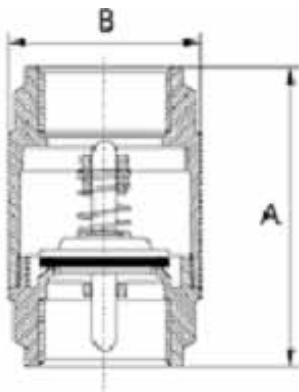

COMPONENT	MATERIAL
BODY	HOT PRESSED BRASS
SEAT	STAINLESS STEEL CF8M
SEAT INSERT	NBR
SPRING	STAINLESS STEEL

DIMENSIONS										
SIZE mm	10	15	20	25	32	40	50	65	80	100
A	54	57	64	75	82	93	100	120	140	158
B	35	35	42	48	61	71	87	120	140	172
MAX kPa	2,500	2,500	2,500	2,500	1,800	1,800	1,800	1,200	1,200	1,200

Data Sheet No. CS-EURO100-Rev01

For installation, operation and maintenance refer to I.O.M.

Details subject to change

**Global Valves and Engineering Pty Ltd**  
*"your partner for the future"*

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au