

CAST IRON GATE VALVE

14 BAR RATED

SIZE RANGE 50mm-300mm

Table E

Suitable for isolating duties in sewerage and Water Treatment, Pulp & Paper, Power Generation, HVAC, Mining, Fire Protection and other General Industries.



FEATURES

- Metal seated, DZR stem
- Outside screw and yoke, rising stem
- Bronze trim (wedge & body seat rings)
- Full port - low head loss

OPTIONS

- Fig. 3579 (inside screw)
- Electric actuator 240 - 415V

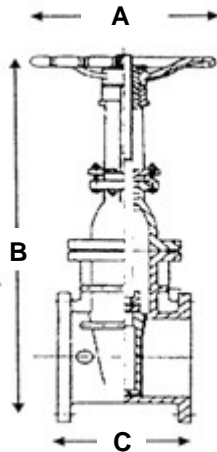


Fig. 3579-OS&Y



COMPONENT	MATERIAL
BODY / BONNET	CAST IRON AS1830 Gr 220
WEDGE	CAST IRON AS1830 Gr 220
WEDGE / BODY SEAT RINGS	GUNMETAL AS1565
STEM	ARSENICAL BRASS
BODY FINISH	PAINTED

DIMENSIONS

SIZE mm	50	65	80	100	125	150	200	250	300
A	160	180	198	250	280	300	355	400	450
B	290	320	363	450	520	565	764	948	1059
C	178	190	203	229	254	267	292	330	356
MAX kPa @ 38°C	1,400	1,400	1,400	1,400	1,400	1,400	1,400	1,400	1,400

Data Sheet No. GA-3579-OS&Y-Rev01

For installation, operation and maintenance refer to I.O.M.

Details subject to change

Global Valves and Engineering Pty Ltd

"your partner for the future"

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au