

BRONZE RELIEF VALVE

20-40 BAR *RATED

SIZE RANGE 15mm-50mm

BSP M x F

Suitable for pressure relieving applications on Water, Steam, Air and Neutral Gases in Pulp & Paper, Power Generation, HVAC, Mining and other General Process Industries.



FEATURES

- Standard spring range 0.3 to 10 bar
- Suitable for use from -45 to 185 Deg C
- Bronze body
- Dome type cap
- Male inlet / female outlet
- Drip tight soft seated

OPTIONS

- Fig. SRV-L (with easing lever)
- Fig. SRV-SS (stainless steel design)

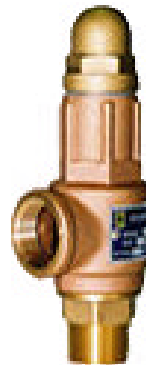
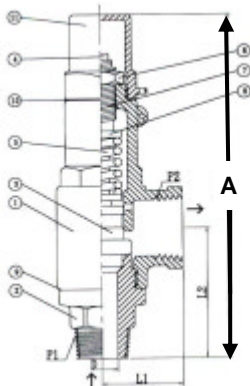


Fig. SRV

COMPONENT	MATERIAL
BODY	BRONZE
COVER	BRASS
SPRING	STEEL
SEAT/STEM/DISC	BRASS
CAP	FORGING BRASS
DISC INSERT	P.T.F.E.
BODY FINISH	SHOT BLAST

DIMENSIONS

SIZE mm	15	20	25	32	40	50
A	139	150	182	208	233	266
BORE Ø	13	19	25	32	38	50
*MAX PRESSURE kPa	4,000	4,000	4,000	3,000	3,000	2,000
FLOW RATE L/min @ ?P 700kPa	55	87	159	258	373	619
WT. KG	0.53	0.68	1.10	1.87	2.28	3.91

Data Sheet No. RV-SRV-Rev01

For installation, operation and maintenance refer to I.O.M.

Details subject to change

Global Valves and Engineering Pty Ltd

"your partner for the future"

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au