

# CAST IRON STRAINER

'Y' PATTERN 16 BAR RATED

SIZE RANGE 50mm-500mm AS 2129 Table E & D

Suitable for removal of pipeline debris from pipelines on Water, LP Steam, Gases and Compressed Air in Water Treatment, Pulp & Paper, Power Generation, HVAC, Mining and other General Industries



## FEATURES


- FBE corrosion resistant coating
- Stainless steel screen
- Large basket area
- Easily removable bolted cover
- Drain plug

Fig. Y232



## OPTIONS

- Manual blowdown valve
- Fig. GTD (duplex filter)

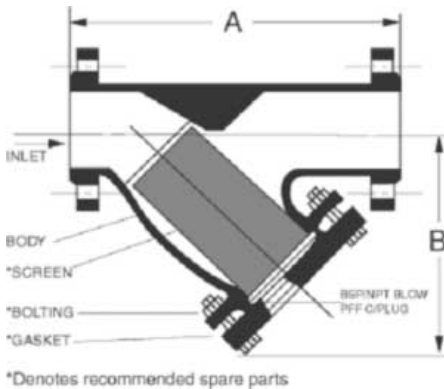

COMPONENT	MATERIAL
BODY	CAST IRON A126 Gr B
SCREEN	STAINLESS STEEL 304
COVER	CAST IRON A126 Gr B
GASKET	PTFE / GRAPHITE
BODY FINISH	FBE COATED

## DIMENSIONS

SIZE mm	50	65	80	100	125	150	200	250	300	350	400	450	500
A	225	273	295	352	416	470	543	660	762	950	1080	1168	1275
B	155	205	215	245	295	320	415	485	560	780	840	902	991
MAX kPa @ 232°C Steam	880	880	880	880	880	880	880	880	880	880 @120°C	880 @120°C	880 @120°C	880 @120°C
MAX kPa @ 65°C WOG	1,600	1,600	1,600	1,600	1,600	1,600	1,600	1,600	1,600	1,000	1,000	1,000	1,000
WT. KG	10	16	24	34	52	70	110	185	295	370	556	1022	1621

Data Sheet No. STR-Y232-Rev01

For installation, operation and maintenance refer to I.O.M.

Details subject to change

**Global Valves and Engineering Pty Ltd**

*"your partner for the future"*

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au