

GLOBAL "TWIST-SET" POSITION INDICATOR

With Micro Switches

With PC mounted switches




Fig. 1100 (Options)



HOUSING

Materials: lid - Polycarbonate
body - ABS
shaft - Stainless Steel

Electrical Entries: 2 x M20 (PG 13.5 or 1/2" NPT)
Mounting: VDI/VDE3845 (NAMUR)
Enclosure: IP 67

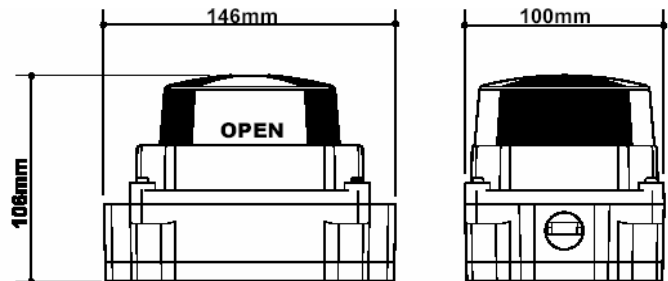


SENSORS

Type: Single Pole Double Throw
Rating: 250 Volts 10 Amps
Temperature: -20°C to 80°C


OPTIONS

TS PC2 2 Limit switches with solenoid terminals
TS PC4 4 Limit switches with solenoid terminals
TS POT 1 KOHM Potenciometer
TS POT-2 1 KOHM Potenciometer with 2 switches
TS LINEAR 2 Switches set to any angle 0 - 90 degrees.

WIRING DIAGRAM

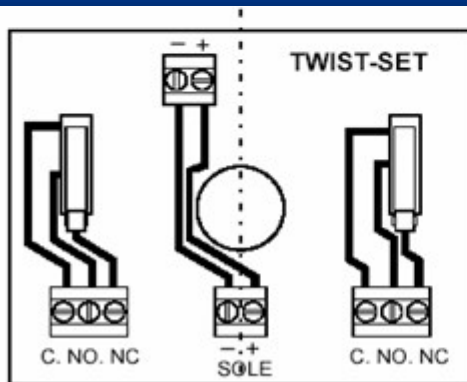

TS PC2

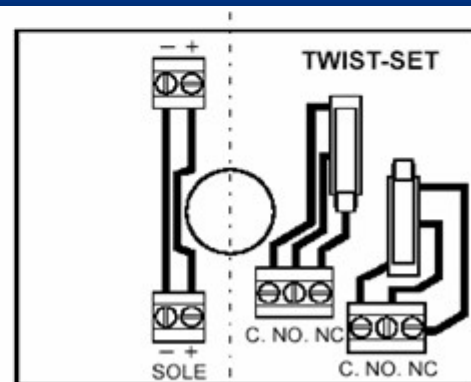

TS LINEAR

Data Sheet No.1100

For installation, operation and maintenance refer to I.O.M.

Details subject to change

Global Valves and Engineering Pty Ltd

"your partner for the future"

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au