

ACTUATED BUTTERFLY VALVE PACKAGE

LIMIT SWITCH - Explosion Proof Ex IIb C T6
DOME TYPE INDICATOR

SOLENOID - Explosion Proof EEx-m- II T6

PNEUMATIC ACTUATOR - Double Acting/Spring Return



LIMIT SWITCH BOX

- Explosion Proof Ex IIb C T6
- Powder Coated Die Cast Aluminum Housing
- Dome Type Polycarbonate Indicator
- 2 x M20 Cable Entries
- 2 x P & F Proximity Switches
- VDI/VDE Mounting
- Stainless Steel Drive Shaft
- Stainless Steel Retaining Screws

SOLENOID

- Explosion Proof EEx -m-II T6
- Flying lead (3 meters)
- NAMUR Interface
- 3/2 Way and 5/2 Way
- Polyamide Body
- Manual Override
- 40mm Coil 1.8 Watt
- Operating Voltage 24V DC
- Port Connection 1/4"


ACTUATOR

- Heavy Duty Extruded Aluminium Body
- Double Acting or Spring Return Models
- Rack and Pinion Design
- ISO 5211 Mounting
- NAMUR Solenoid Interface
- VDI/VDE Top Works
- Fully Adjustable Travel Stops
- Stainless Steel Drive Shaft
- NBR 'O' Rings and Seals
- PTFE Friction Guides

VALVE

- Cast Iron Epoxy Coated Body PN16 Rated
- Wafer or Lugged Design
- Stainless Steel Disc
- Stainless Steel Shaft
- EPDM Liner
- ISO 5211 Top Works

Fig. EX - APLEX - 6EXFL

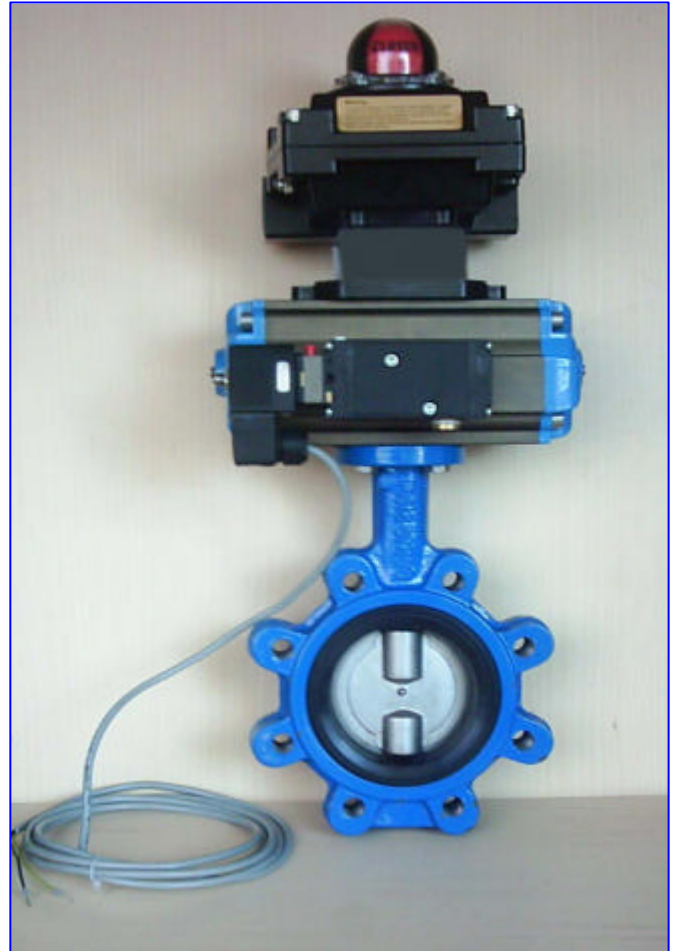

Data Sheet No. EX APLEX 6EXFL

Details subject to change

OPTIONS AND ACCESSORIES

Control Accessories

- Quick Exhaust Valves
- High Temp Actuator Seals
- Speed Controllers
- Exhaust Silencers
- Manual Override
- Positioners

Solenoid Valves

- Junction Box Explosion Proof
- Armoured Cable and Connectors

Global Valves and Engineering Pty Ltd

"your partner for the future"